

## Multi-Point Locks for PVCu

### ► 3 Hook 2 Roller

- Designed to meet the requirements of PAS 24 as part of a compliant door system, and BS 6375
- Licensed by Secured by Design
- Euro Cylinder or Vectis Plus options available
- Available as 35mm Backset only with 16mm face bar
- Non-handed lock mechanism with reversible sash bolt to minimise stock requirements
- Snib facility as standard on all locks
- Accepts standard 92mm unsprung handles and euro profile cylinders (operates with all BS and DIN specification cylinders and most other types of cylinder)
- Split spindle for lever/pad applications - choice of length available
- Bi-directional throw of locking features - enhanced anti-jemmy feature
- Triple high security forged brass hooks for anti-separation resistance - 10mm engagement into keeps
- Hooks deadlocked in the fully thrown position
- 6000 Series adjustable steel keeps offering  $\pm 2.0\text{mm}$
- Continuous keep available
- Precision adjustable rollers for enhanced performance and weather sealing
- Easy-fit packer system for alternative profiles
- Optional shoot bolt engagement for additional security
- Single and French door (slave lock unit) application

#### Locking Mechanism



#### Keeps (6000 Series)



#### Shootbolt (Optional)



#### TECHNICAL SPECIFICATION

Corrosion resistance  
Plated to BS EN 1670 Grade 4

---

Operation  
Function test to 100,000 cycles

#### MATERIAL SPECIFICATION

Lock case:	Steel BZP CR3 Passivate + Seal
Face bar:	Steel BZP CR3 Passivate + Seal
Hooks and Sash bolt:	Forged brass satin chrome plate
Rollers:	Steel BZP CR3 Passivate + Seal
Shoots:	Steel BZP CR3 Passivate + Seal
Keeps:	Steel BZP CR3 Passivate + Seal
Continuous Keep:	Steel BZP CR3 Passivate + Seal

# Multi-Point Locks for PVCu

## ► 3 Hook 2 Roller

### KEY

<b>B</b>	Backset	<b>OL</b>	Overall Length	<b>TR</b>	Top Roller
<b>DL</b>	Datum Line	<b>TH</b>	Top Hook	<b>BH</b>	Bottom Hook
<b>BR</b>	Bottom Roller				

LOCKING MECHANISM - OPTION 1							
B	DL	OL	TH	TR	BH	BR	Part No.
35	1050	2250	610	715	610	715	6635-00-85AA
LOCKING MECHANISM - OPTION 2							
B	DL	OL	TH	TR	BH	BR	Part No.
35	1050	2250	730	835	750	855	6635-00-85BA
PACKAGING							
5 locks per box							

For Vectis Plus part codes please contact the sales office

OPTIONAL EXTRAS		
B	Slave Unit	Shoot Bolt
35	•	•

### MAINTENANCE

All moving parts should be lightly lubricated using a light non-acidic mineral oil (e.g. "3 in 1") twice per year and the surface cleaned with a soft damp cloth. The product may need to be adjusted and fixings tightened to ensure a satisfactory operation.

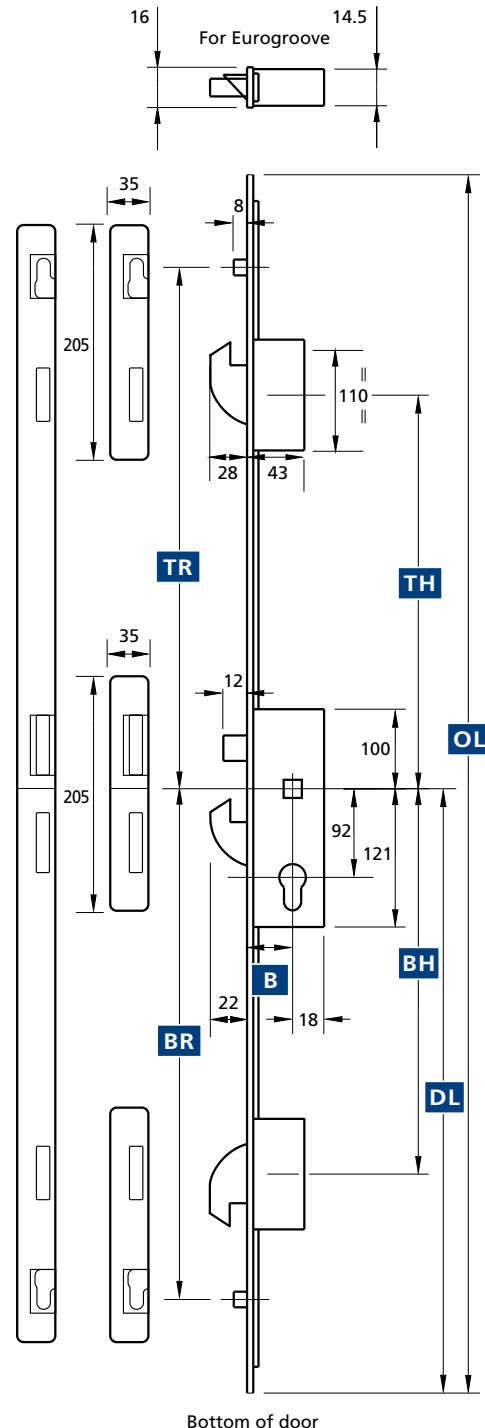


Diagram illustrates product in locked position.  
Not to scale.

All dimensions are in mm and are nominal.  
ERA reserves the right to change specification without notice  
It is the responsibility of the door manufacturer to ensure that the finished product meets any required safety and performance specification.

